



<If there is any change on the dimension, also please change A relatively>.

Remark:
 <01>Fasten rebar by steel wire & put H beam on top of it, ensure its levelling by level gauge.
 <02>Cast H beam into concrete base, careful not to shift it during liquid concrete pouring.
 <03>Foundation H beam specs:250X250.
 <04>Mixing ratio of concrete : cement/sand/gravel/ :1:2:3.

Applied sect No.	Machinery installation T6DEA150
------------------	---------------------------------

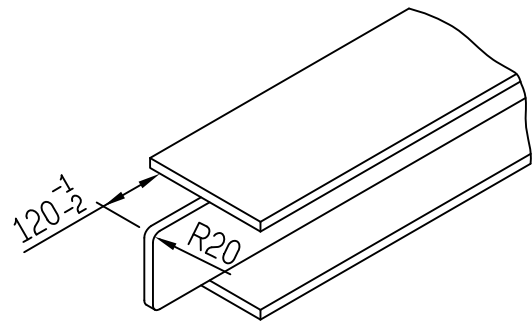

- Cutting at both ends-12 pcs
- <C> One end cutting-2 pcs
- <D> Cutting at both ends-3 pcs
- <E> One end cutting-2 pcs
- <F> Cutting at both ends-2 pcs
- <G> Cutting at both ends-1 pc
- <H> One end cutting-2 pcs
- <J> Cutting at both ends-3 pcs

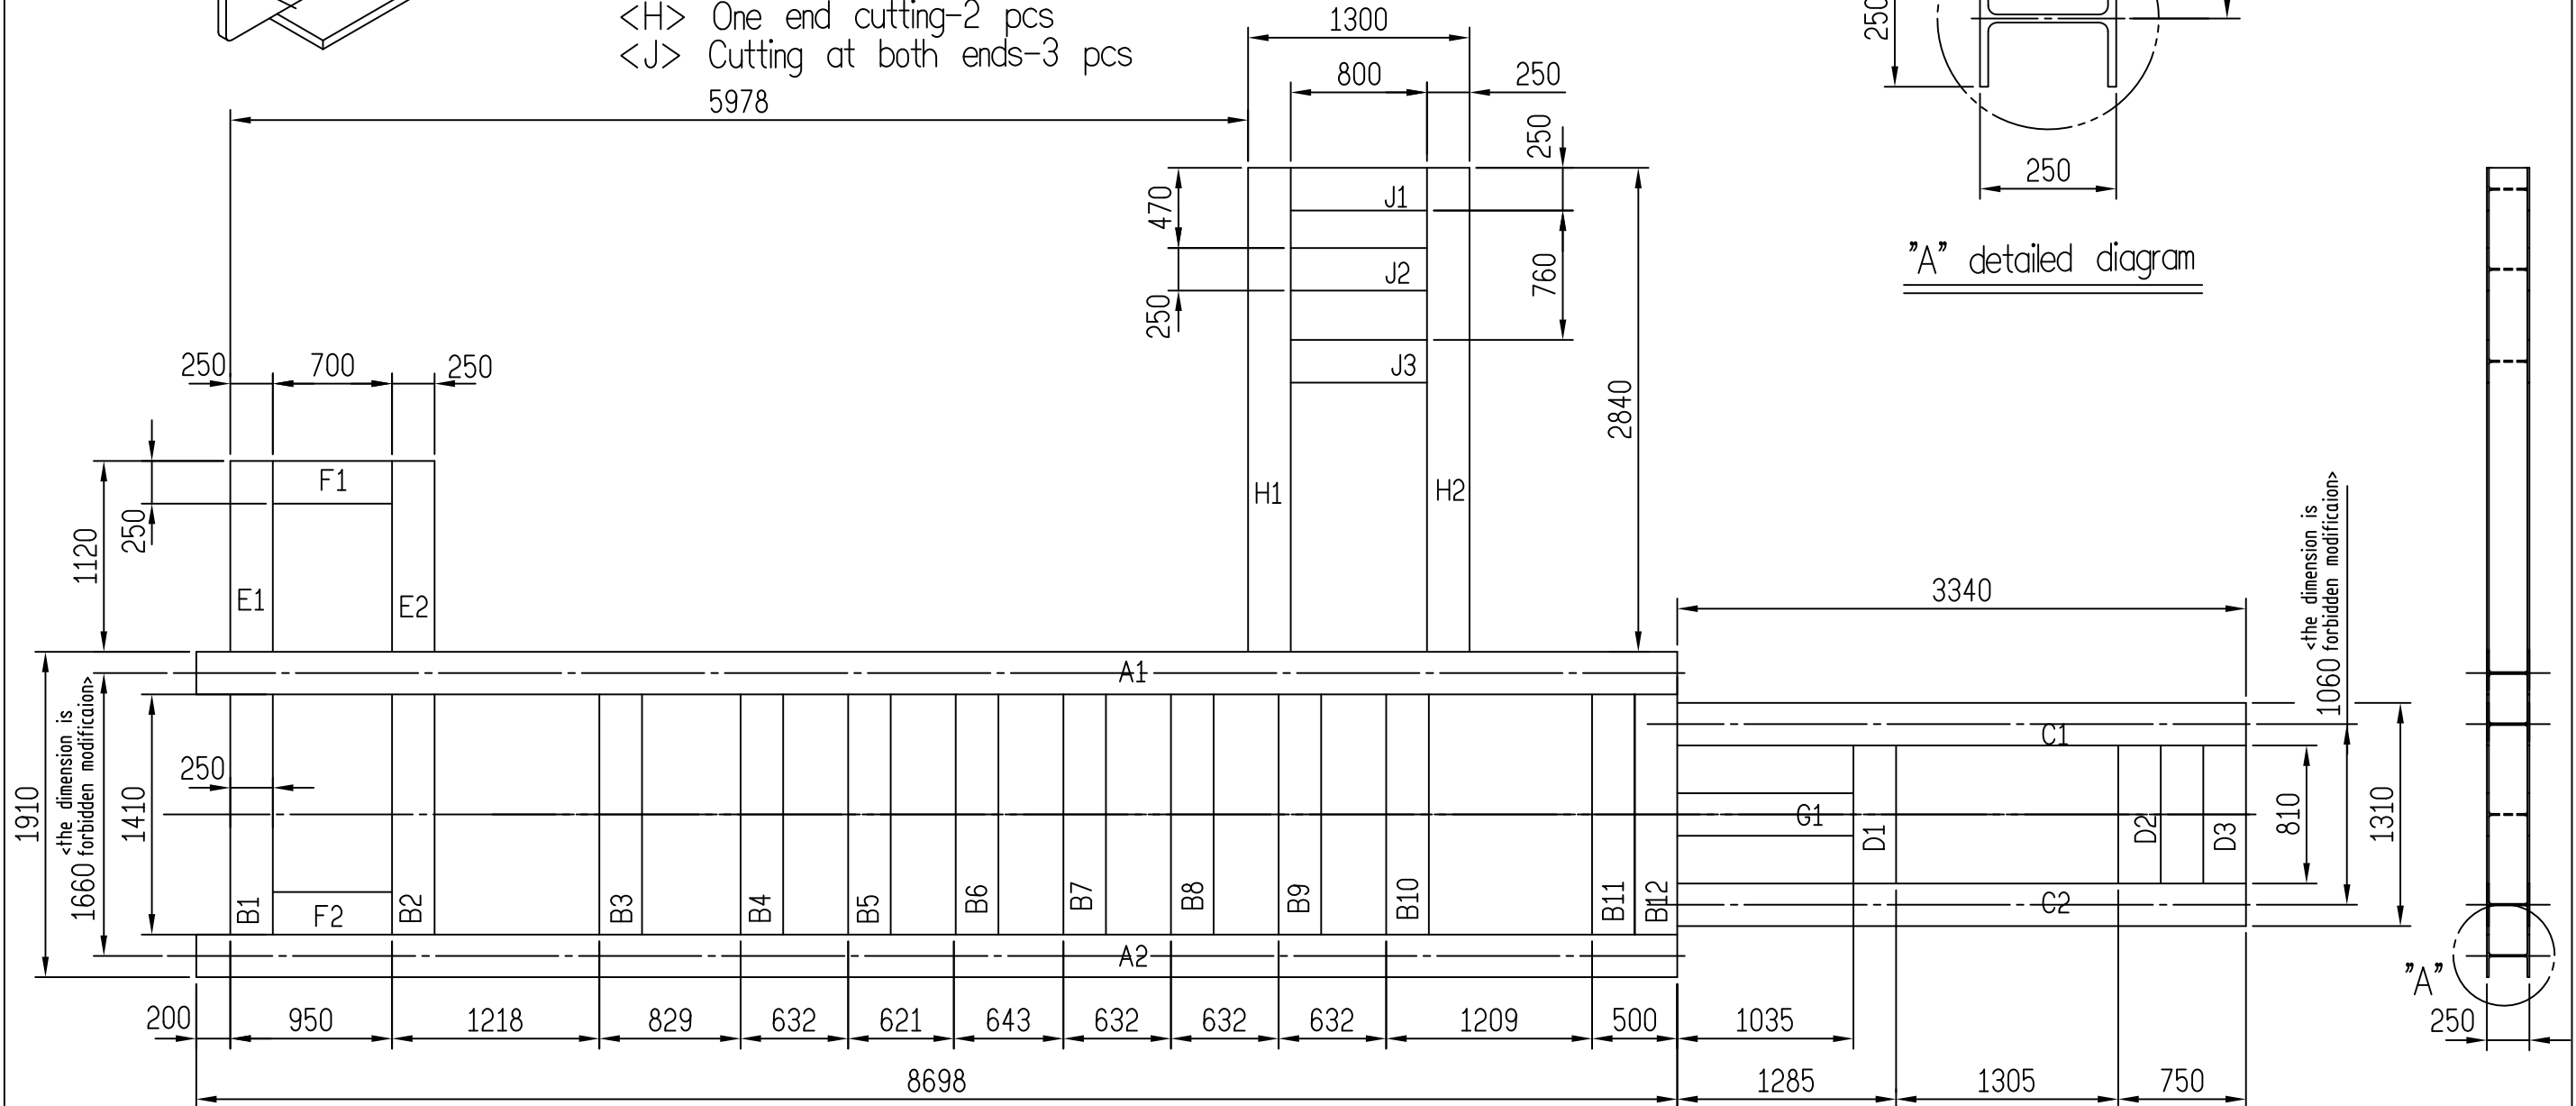

Material:

- <A> 250X250 H-steel X8698L-2Pcs
- 250X250 H-steel X1650L-12Pcs
- <C> 250X250 H-steel X3460L-2Pcs
- <D> 250X250 H-steel X1050L-3Pcs
- <E> 250X250 H-steel X1240L-2Pcs
- <F> 250X250 H-steel X940L-2Pcs
- <G> 250X250 H-steel X1275L-1Pc
- <H> 250X250 H-steel X2960L-2Pcs
- <J> 250X250 H-steel X1040L-3Pcs

Remark:<01>If H-steel specification be change,that 1310 and 1910L must be change.
<Because dimension 1660 and 1060L don't change>.

1:40

Applied sect	H steel frame soldering drawing for M/C foundation-1600T
No.	T6DEBASE